




LBW-50 with relief line vent sensor mounting

Typical for:
LBW-50 (pictured here)
LBW-Watchman
LBW-420
Remote Sensor

Typical Installation

2-inch union required for testing & calibrating

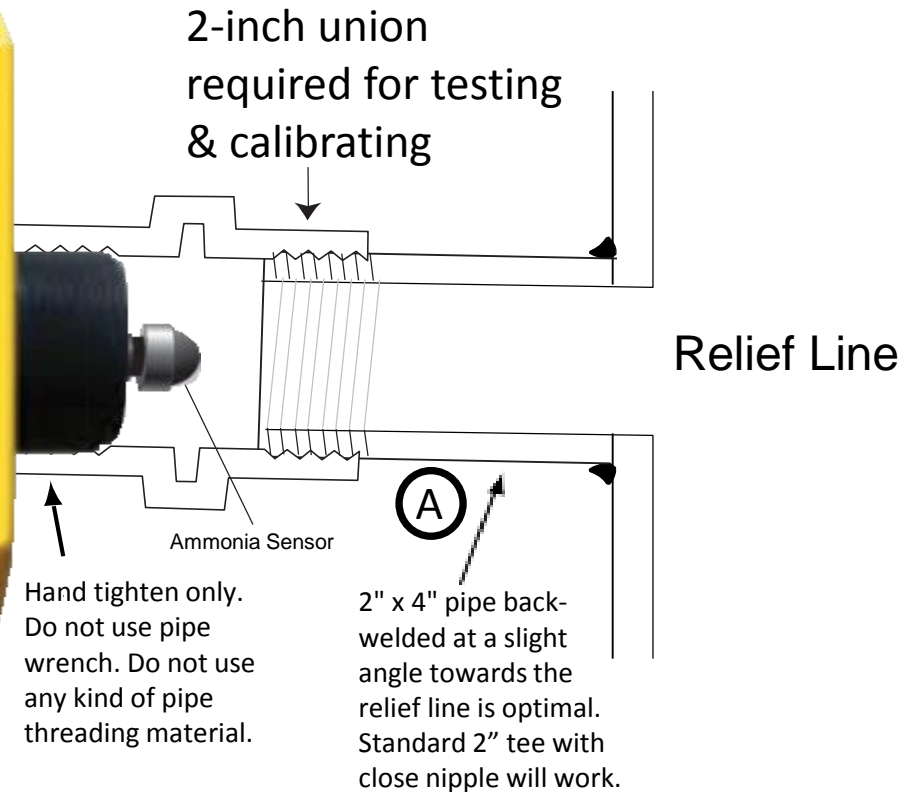

NOTES:

(A) = If LBW-50-RLV is mounted on the relief line above the roof drill 3/16" hole for condensation drain at this location.
DO NOT DRILL THIS HOLE IF MOUNTED INSIDE A BUILDING.

LBW-50-RLV should be mounted above the roof, above the last relief valve connection, and accessible for testing or calibration.