


### **TOP VIEW**

### **ISOMETRIC VIEW**

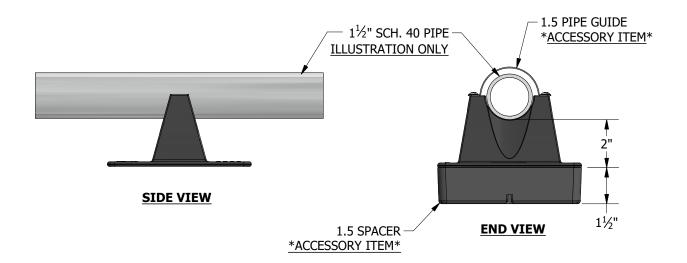

# **ACCESSORIES**

- 1.5 pipe guide
- 1.5 spacer
- 12x12 Support pad
- Eternabond® 2-sided tape

## **PRODUCT DESCRIPTION**

A pipe support used to support roof-mounted gas pipes, electrical conduit, solar piping and other mechanical piping.

Unique design absorbs thermal expansion and contraction of pipes thus preventing damage to the roof membrane.

Pipes rest in a 'U' shaped cradle situated in a polycarbonate resin base.

## **KEY INFORMATION**

- Support is optimized to carry up to a 1½" pipe.
- Maximum pipe OD for the support is 1.9".
- Pipe clearance is 2"
- Maximum load is 72 lbs. based on 3.0 psi to the roof deck. Even load required.
- 63 per case, 22 lbs. per case, (DW= 14 lbs.)
- Recommended spacing is not to exceed 7' centers depending upon the load. Make certain each pipe support is properly elevated to evenly distribute weight at all pipe support locations.
- Base Material: Polycarbonate
- 20 Year Warranty

The information contained in this drawing is the sole property of MIRO Industries, Inc.

Any reproduction in part or as a whole without written permission of

MIRO Industries, Inc. is prohibited.

DATE: JAN 2019

1.5 PILLOW BLOCK