

SEP-101D UTILITY GAUGE PLASTIC CASE

1 Plastic case utility gauge for commercial and industrial markets Black plastic case, copper alloy internals

SPECIFICATIONS

Dial 2" (50 mm)

Case Plastic, dry non-fillable

Wetted Parts Copper alloy Plastic Lens


Black aluminum **Pointer** Connection Lower mount

2" dial = 1/8" or 1/4" NPT

Scale Standard: psi/BAR (x 100 = kPa) 3-2-3% of span, ASME B40.1 Grade B Accuracy

-40° F to 140° F **Ambient Temp**

Design meets or exceeds ASME B40.100 pressure gauge standard.

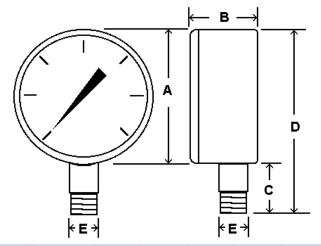

Dial	Unit	Α	В	С	D	E
2"	ln.	2.09"	1.14"	0.83"	2.83"	1/8" or 1/4"
	mm	53	29	21	72	NPT



AVAILABLE OPTIONS*

- Certificate of Accuracy, NIST traceable
- Custom Dial
- Anti-Vibration Movement, see page 109
- Cleaned for Oxygen Service
- Special Connection Size
- Protective Rubber Cover, see page 121
- Max/Min Pointer, see page 122

^{*}Lead times/minimums may apply

APPROXIMATE BOX QUANTITII		VEIGHTS/
Dial Size	Est. Unit	Box Qty

Dial Size	Est. Unit Weight	Box Qty
2"	0.15 lbs (0.08 kg)	100

SEP-102D UTILITY GAUGE PLASTIC CASE



Plastic case utility gauge for commercial and industrial markets Black plastic case, copper alloy internals

SPECIFICATIONS

Dial 2" (50 mm)

Plastic, dry non-fillable Case


Wetted Parts Copper alloy Plastic Lens

Pointer Black aluminum Center back mount Connection 2" dials = 1/4" NPT

Scale Standard: psi/BAR (x 100 = kPa) 3-2-3% of span, ASME B40.1 Grade B Accuracy

-40° F to 140° F **Ambient Temp**

Design meets or exceeds ASME B40.100 pressure gauge standard.

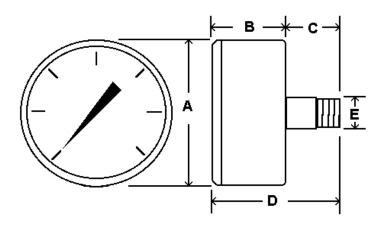

Dial	Unit	Α	В	С	D	E
2"	ln.	2.11"	1.06"	0.71"	1.77"	1⁄4" NPT
	mm	54	27	18	45	



AVAILABLE OPTIONS*

- Certificate of Accuracy, NIST traceable
- Custom Dial
- Anti-Vibration Movement, see page 109
- Cleaned for Oxygen Service
- Special Connection Size
- Protective Rubber Cover, see page 121
- Max/Min Pointer, see page 122

*Lead times/minimums may apply

APPROXIMATE SHIPPING WEIGHTS/ BOX QUANTITIES

Dial Size	Est. Unit Weight	Box Qty
2"	0.20 lbs (0.08 kg)	100